



Company Profile

“Illuminate your environment with LED lights of impeccable style”

Ecolux facilitates the diverse lighting needs of people by offering an enormous array of LED luminaries. The LED lights of the company are designed specifically to meet the high standards of architectural quality and we have multiple options for both outdoors or indoors as well as Industries. The quality of our LED lights is equally matched by our commitment of maintaining exceptional customer service.

Ecolux was founded in 2012 with the goal to present new possibilities of illumination for houses, apartments, offices, commercial establishments, Industries, etc. Our commitment to quality and tireless efforts has taken our company to new heights beyond our wildest imaginations. Today, we have more than hundred employees with twelve qualified people leading our responsibilities of research & development. Also, our manufacturing facility covers a massive 25,000 sq. ft area which helps the functions of our five separate production lines in use.

As a company situated in India, with Make in India initiative of Govt., Ecolux is dedicated to serving the unique interests of Indians with numerous, intuitively developed LED lighting options. Our commitment to quality and uncompromising service standards have also helped us earn ISO 9001-2000 certification of quality.



Vision of Ecolux

Our vision is to be an ultra-modern enterprise that delivers LED lights as per the needs of our clients at a faster pace. Thus, we have been able to deliver high-quality LED lights consistently for many years with a reputation for faster delivery of High quality products. Also, we have been commended for our efforts to develop new designs that earn the love and respect of our clients.

Our emphasis on customization and adherence to modularization make our facility a workshop for dreamers. Our multi-faceted approach to manufacturing LED lights gives us the opportunity to deliver high-affordable lights with unmatched quality.



Research & Development

“Quality is the cornerstone of our R & D”

Our team of Research & Development has helped us to reach the place we are now through constant innovation and consistent improvements. Our R & D efforts are intended to make our company the epitome of quality. Also, we combine our tireless efforts with our elaborate 25 years of experience in the fields of Electronics, Product Design, Industrial Design, Quality Management system and so on. To deliver LED lights that exceed your expectations we have a decade-long experience in developing the most.

So, when you take the decision to choose one or more of our products, you will also be making the choice to uphold quality, experience, and appeal for your indoor and outdoor necessities.




Manufacturing & Innovation Center

“We bridge the gap between the designs you love and the quality you deserve”

We are gifted with a team of dedicated and highly-talented individuals that have a colorful experience in the industry. Thus, they play a major role in keeping our drive for innovation alive, helping our organization to work and grow together as a team.

Also, we keep constant tabs on technological advancements, so that we can always stay one step ahead of the necessities and interests of our clients. Our manufacturing and designing segments are retrofitted with cutting-edge tools and software systems, time and time again. So, from the time of our founding, our LED lights have always been a symbol of quality and endearment.

Designs of Ecolux exhibit stellar quality and precision, and our design facility embraces the most advanced tools and techniques to aid effective measurement, simulation, and validation. In this way, our new designs are analyzed and authenticated stringently in terms of accuracy, safety, and overall quality. So, when a product leaves our facility after passing through our rigorous testing measures, it is bound to be immaculate. Also, we bring swiftness and quality together with our 3-D Printing facility that is situated in-house, thereby fulfilling customer expectations with unmatched speed.

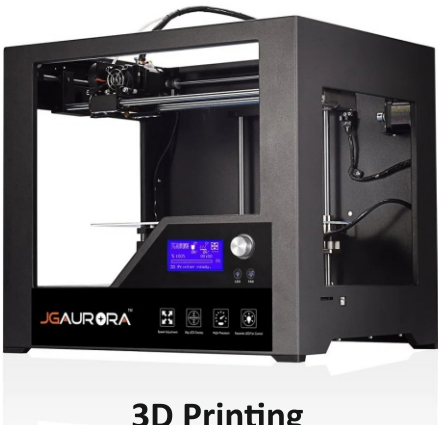

Manufacturing & Innovation Center



Fabrication



Powder Coating



PCB Manufacturing



SMT Assembly



4 Assembly Lines with a capacity of 2000pcs Per Day



Spectrophotometer



Electrical Testing



IP Testing



LANDSCAPE LIGHTING



Simple Spike Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Size	Height
EL001	6W - 12W	3000K - 6500K	IP65	100X 75	100 mm



Telescopic Spike

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diameter X Height	
EL002	3W	3000K - 6500K	IP65	60 X 130	
EL003	6W	3000K - 6500K	IP65	73 X 180	



Pillar Highlighter

Code	Wattage (W)	Beam Angle	Colour Temperature	Ingress Protection	Dimension (mm)	
					Diameter X Height	
EL004	3W - 6W	10°	3000K - 6500K R, G, B, Amber	IP65	42 X 81	
EL005	8W - 12W	10°	3000K - 6500K R, G, B, Amber	IP65	71 X 155	



Plastic Bulkhead V1

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Height X Length X Width	
EL006	10W	3000K - 6500K	IP65	50 X 175 X 95	



Plastic Bulkhead V2

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)
				Height X Length X Width
EL007	6W	3000K - 6500K	IP65	50 X 125 X 95
EL008	10W	3000K - 6500K	IP65	50 X 175 X 95



Plastic Bulkhead V3

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)
				Height X Length X Width
EL009	10W	3000K - 6500K	IP65	65 X 175 X 95



Aluminium Bulkhead

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)
				Length X Width X Height
EL010	8W - 24W	3000K - 6500K	IP65	205 X 122 X 70



K Wall Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Length	Width	Height
EL011	3W	3000K - 6500K	IP54	80	65	75
EL012	6W	3000K - 6500K	IP54	80	65	142



Flat Wall Light

Code	Wattage (W)	Beam Angle	Colour Temperature	Ingress Protection	Dimension (mm)
					Height X Length X Width
EL013	2 * 3W	60°	3000K - 6500K	IP54	65 X 50 X 60
EL014	4 * 3W	60°	3000K - 6500K	IP54	77 X 77 X 57



Surface Wall Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Length	Width	Height
EL015	4W	3000K - 6500K	IP54	95	70	45
EL016	8W	3000K - 6500K	IP54	150	70	45



Wall Washer

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Length	Width	Height
EL017	20W - 24W	3000K - 6500K RGB	IP66	500	46	50
EL018	40W - 48W	3000K - 6500K RGB	IP66	1000	46	50



Rigid Bar

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Length	Width	Height
EL019	6W - 12W	3000K - 6500K RGB	IP67	500	17	11
EL020	15W - 24W	3000K - 6500K RGB	IP67	1000	17	11



Metal Body Swimming Pool Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL021	6W - 18W	3000K - 6500K, RGB	IP68	100	22
EL022	9W - 27W	3000K - 6500K, RGB	IP68	125	25
EL023	12W - 36W	3000K - 6500K, RGB	IP68	125	25



ABS Body Swimming Pool Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL024	3W - 9W	3000K - 6500K, RGB	IP68	140	40
EL025	6W - 18W	3000K - 6500K, RGB	IP68	165	40
EL026	9W - 27W	3000K - 6500K, RGB	IP68	228	40
EL027	12W - 36W	3000K - 6500K, RGB	IP68	228	40



Full Lens Swimming Pool Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL028	12W - 36W	3000K - 6500K, RGB	IP68	225	40



SS Swimming Pool Light

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL029	6W - 36W	3000K - 6500K, RGB	IP68	200	35



Square Bollard

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL030	8W - 15W	3000K - 6500K	IP66	95	300/600/900



Triangle Bollard

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL031	8W - 15W	3000K - 6500K	IP66	100	300/600/900



Table Top Bollard

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Pole Dia	Top Dia	Height
EL032	8W - 15W	3000K - 6500K	IP66	60	150	300/600/900



Street Light Bollard

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Length	Breadth	Height
EL033	8W - 15W	3000K - 6500K	IP66	100	45	600/900



Tower Bollard

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL034	8W - 15W	3000K - 6500K	IP66	85	300/550/850



Peak Bollard


Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Height
EL035	8W - 15W	3000K - 6500K	IP66	85	300/550/850



Donut Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL036	50W - 100W	3000K - 6500K	IP66	400/500	300/400	60/75	2400/3000/3600


*Pole is optional.

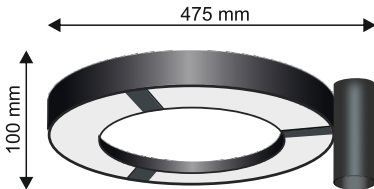

Flag Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL037	50W - 100W	3000K - 6500K	IP66	475	100	60	2400/3000/3600

*Pole is optional.



Mashaal Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL038	30W - 50W	3000K - 6500K	IP66	500	425	75	2400/3000/3600


*Pole is optional.



Tilted Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL039	30W - 50W	3000K - 6500K	IP66	500	425	75	2400/3000/3600


*Pole is optional.



King Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL040	30W - 50W	3000K - 6500K	IP66	500	700	75	2400/3000/3600


*Pole is optional.



Queen Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL041	30W - 50W	3000K - 6500K	IP66	325	450	60	2400/3000/3600


*Pole is optional.

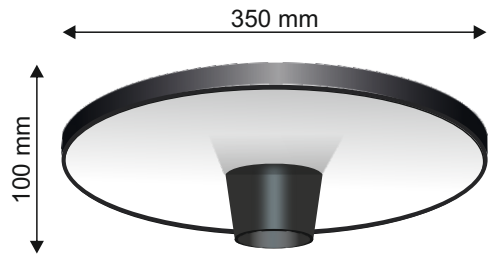

Umbrella Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL042	30W - 50W	3000K - 6500K	IP66	350	100	60	2400/3000/3600


*Pole is optional.

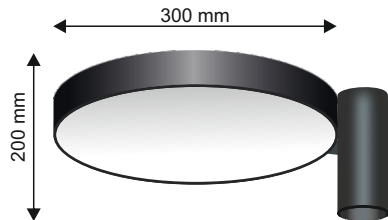

Drum Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL043	30W - 50W	3000K - 6500K	IP66	300	200	60	2400/3000/3600

*Pole is optional.



Zero Postop

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL044	30W - 50W	3000K - 6500K	IP66	350	20	60	2400/3000/3600


*Pole is optional.



Fountain Postop


Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)			
				Diametere	Height	Pole Dia	Pole Hieght
EL045	30W - 50W	3000K - 6500K	IP66	450	650	75	2400/3000/3600

*Pole is optional.

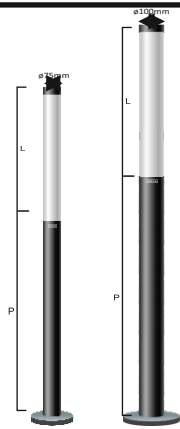

Bamboo Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Diametere	Acrylic Height(L)	Pole Height(P)
EL046	12W - 36W	3000K - 6500K	IP66	75	300/600/900	1200/1800/2400
EL047	24W - 50W	3000K - 6500K	IP66	100	600/900	1800/2400/3000

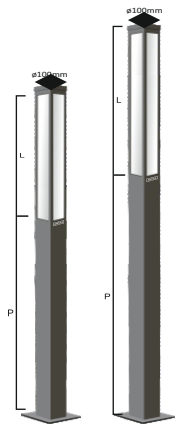


Square Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)		
				Diametere	Acrylic Height(L)	Pole Height(P)
EL048	24W - 50W	3000K - 6500K	IP66	100	600/900/1200	1800/2400/3000




Grill Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Pole Height
EL049	24W - 50W	3000K - 6500K	IP66	100	1800/2400/3000

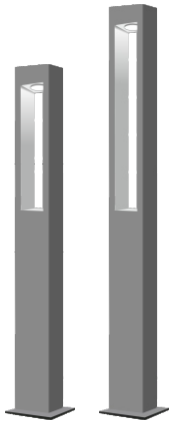

AC Tower Pole


Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diameter	Pole Height
EL050	24W - 50W	3000K - 6500K	IP66	150 X 100	1800/2400/3000

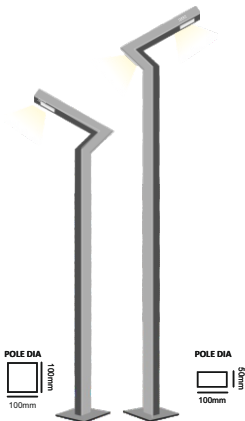

Zigzag Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Pole Height
EL051	50W - 100W	3000K - 6500K	IP66	50 X 100	2400/3000/3600

EL052	50W - 100W	3000K - 6500K	IP66	100 X 100	2400/3000/3600
-------	------------	---------------	------	-----------	----------------

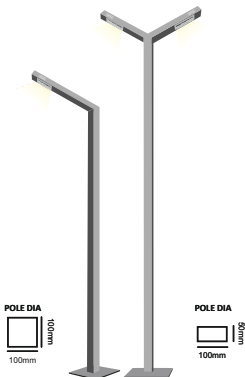

Y Pole


Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Pole Height
EL053	50W - 100W	3000K - 6500K	IP66	50 X 100	2400/3000/3600

EL054	50W - 100W	3000K - 6500K	IP66	100 X 100	2400/3000/3600
-------	------------	---------------	------	-----------	----------------



Maharaja Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Pole Height
EL055	50W - 100W	3000K - 6500K	IP66	60 X 114	3000/4000/5000

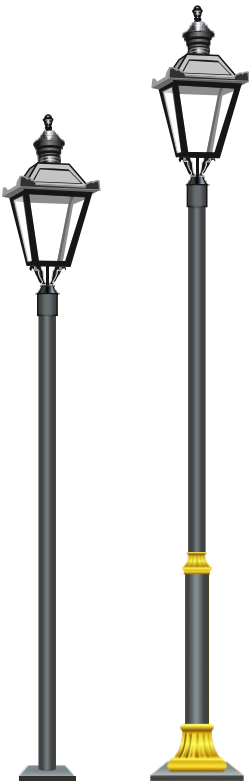

Maharani Pole

Code	Wattage (W)	Colour Temperature	Ingress Protection	Dimension (mm)	
				Diametere	Pole Height
EL056	24W - 50W	3000K - 6500K	IP66	75	2400/3000/3600
EL057	50W - 100W	3000K - 6500K	IP66	75 X 114	2400/3000/3600



Factory Address

Unit No 2, Building No 1, Shri Narayan Industrial Estate, Plot C, Near Bhajanlal Studio, Kaman-Bhiwandi Road, Kaman, Vasai East, Palghar - 401208.
Tel : 7303085443

Office Address

C102, Raheja Serenity, Thakur Village, Kandivali East, Mumbai 400101

South India Office

Beginest 3488, 14th main HAL 2nd stage Indiranagar Bangalore 560008

Contact Details

☎ 7303085443
✉ ujjwal@ecolux.co.in
🌐 www.ecolux.co.in